

UG511DL

Family	Professional dishwasher
Subfamily	Undercounter Glasswasher
Serie	Easyline
Basket dimensions	500x500 mm
Power connection	400 V 3N~ / 12 A / 6,7 kW / 50 Hz
Width	600 mm
Depth	600 mm
Height	720 mm
Depth with open door	925 mm
Usable load height	307 mm
Maximum dishes diameter	300 mm



Target

Solutions	Coffee shops/Wine bars
-----------	------------------------

Aesthetics

Control panel	electronic	Led color	Green
---------------	------------	-----------	-------

Functions



Functionality	Triple filter; HTR; Door clearance 307mm
---------------	--

Programs

Programs

Boiler 71°C/Tank 60°C - 1'20"	Boiler 85°C/Tank 60°C - 1'10"	Boiler 85°C/Tank 60°C - 2'
Boiler 85°C/Tank 60°C - 3'	Boiler 71°C/Tank 60°C - 2'10"	Boiler 85°C/Tank 60°C - 4'10"
Drain and self cleaning cycle	Yes	
Maximum basket/hour	40	
Maximum dishes/hour	1080	

Interface

Panel	Easyline	Detergent missing alert	Yes
Display	8 digit	Cycle progress alert	Yes
Number of buttons	5	End-cycle alert	Yes
On/Off button	Yes	Manual diagnostic	Yes
Rinse aid missing alert	Yes		

Construction

Tank	Deep drawn	Door gasket	On 3 sides
Tank	Double wall	Rack guides	Embossed
Tank material	Stainless steel AISI 304	Tank capacity	11 l
Back panel	Galvanized	Boiler capacity	6 l
Door	Double wall	Noise	Lpa 56,5 dBA
Balanced door	Yes	Protection class	IPX4
Tank filter	Stainless steel	Net weight	55.000 kg
Washing spray arm	2 in stainless steel	Adjustable feet	25 mm
Rinse spray arm	2 in stainless steel	Drain max. height	600 mm

Consumption and connections

Tank heating element	2000 W	Water cycle consumption	2,3 l
Boiler heating element	6000 W	Warm water connection	Cold 15°C
Washing pump	700 W	Max temperature inlet water	60°C
Default connection	6700 W	Max water hardness	12°FH - 7°dH
Optional electrical connection	230 V 3~ / 19 A / 6,7 kW / 50 Hz; 230 V~ / 12 A / 2,7 kW / 50 Hz; 230 V~ / 16 A / 3,7 kW / 50 Hz; 230 V~ / 21 A / 4,7 kW / 50 Hz		

Electrical Connection

Plug	Not present
-------------	-------------

Manuals and Certifications

Certificate	CE
--------------------	----



Equipments

Peristaltic detergent doser	Electronic control	Drain pump with 3 stage filter system	Yes
Peristaltic rinse-aid doser	Electronic control	Rinse pump H.T.R. system	Yes
Detergent load	1,5 l/h	Partial renewal of water in the tank and built-in drain pump	Yes
Rinse load	0,4 l/h		
Soft Start	Yes		

Boiler thermostat	Yes default ON	Water supply pipe diameter	DN15 - ½"
Conductivity sensor	Si	Drain supply pipe diameter	DN20-G 3/4"
		Automatic start	Yes, default OFF

Accessories Included

Flat basket	1x WB50G02	Drain hose	Yes - 2m
Water supply hose	Yes - 1,5m		

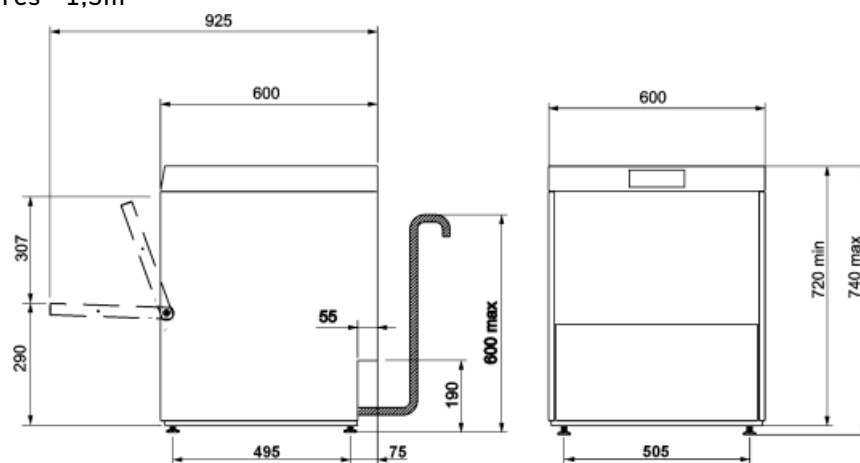

R	PANNELLO RETRO LOWER BACK PANEL
Q	MORSETTO EQUIPOTENZIALE EARTH TERMINAL
P	TUBI POMPE PERISTALTICHE PERISTALTIC HOSES
E	CAVO ALIMENTAZIONE ELETTRICA ELECTRICITY SUPPLY CABLE
S	TUBO DI SCARICO DRAIN HOSE
T	ENTRATA CAVO DI ALIMENTAZIONE DOSATORE ESTERNO EXTERNAL DISPENSER POWER CABLE ENTRY POINT
C	TUBO DI CARICO FILLER HOSE

Not included accessories



PHOOS01

Polypropylene single basket for cutlery



WH00S01

Wire insert for 12 small dishes



WB50G01

Universal wire basket with flat bottom, 500x500x123 mm



WB50G03

Wire basket for 72 mm diameter glasses with inclined bottom, 500x500x235 mm



WB50G04

Wire basket for glasses 135 mm diameter max, with sloped bottom, 500x500x170 mm



WB50G02

Wire basket for 90 mm diameter max glasses with sloped bottom, 500x500x170 mm




KITSONLIV

Probe level kit for double wall models



WS5

Underframe for glasswashers 500mm



PB50G02

Universal flat bottom polypropylene basket, 500x500x170 mm



WB50T02

Wire basket for 7 trays GN1/1 h 20 mm, 500x500 mm



KITDETKCC500

Kit for detergent (1l) and rinse aid (1l) storage for dishwashers and glasswashers 500 double wall

Symbols glossary (TT)



HTR RINSING SYSTEM



PARTIAL DRAIN SYSTEM+



MAX.USABLE HEIGHT 307mm